



Dry verge system for slate

SDV-200 dry verge system for slate

The use of composition mortar for pointing the verge has many inherent problems, not least the requirement for continuous pointing over the years due to the action of frost, rain and differential movement. The use of traditionally pointed verges is becoming far less popular due to the demand for a maintenance free property. Mechanically fixed verges provide secure fixing with none of the long term problems associated with traditional methods and offer highly cost effective solutions for all weather roofing.


Use: Provides a continuous robust fixing for slates whilst covering over the ends of the slating battens to provide a traditional looking appearance and protecting the verge from driving rain and wind uplift. The SDV-214 Dry Verge System for Slate is designed to fit most natural and manmade slates up to 6mm in thickness.

- Advantages:**
- Improved design for better appearance
 - Pre-fitted expansion joints
 - Allows for thermal movement
 - Self draining
 - Protects against wind uplift
 - Weatherproof and maintenance free
 - Quicker to fit than traditional methods
 - Can be fitted in inclement conditions
 - No special tools or skills required

Material & colour: Extruded in Slate Grey uPVC in 2 metre lengths complete with expansion joints.

Ridge end caps: Vacuum formed in colour to match verge extrusion and available to fit various angled or half round ridge tiles.

SDV-214 Angled Ridge End Cap
SDV-302 Half Round Ridge End Cap

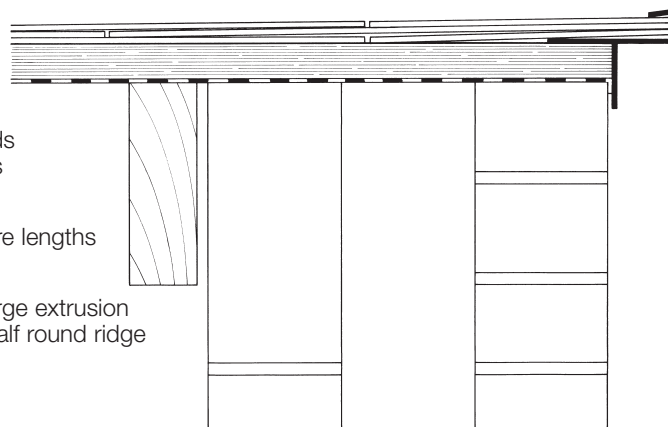

All products contained in this brochure comply with current building regulations, British Standards and N.H.B.C. Requirements. Thysis Building Products maintains a policy of continuous development and reserves the right to amend or change product specification without notice, conditions of sale apply in all instances.




Dry verge system for interlocking tiles

FFV-400 fast fix verge system

The use of traditionally pointed verges is becoming less popular due to the demand from homeowners for a maintenance free property. The use of composition mortar for pointing the verge has many inherent problems, not least the requirement for continuous pointing over the years due to the action of frost, rain and differential movement.

Mechanically fixed verge units provide secure fixing with none of the long term problems associated with traditional methods and offer highly cost effective solutions for all weather roofing. Manufactured from UV Stabilised Co-Polymer Polypropylene.

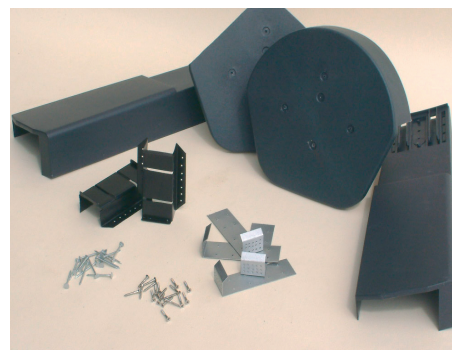

Use: Provides a robust fixing for verge tiles whilst covering over the end of the verge without the use of composition mortar and preserving the traditional stepped appearance. The Fast Fix Kit is designed for use with most large profiled interlocking slates and tiles (including the larger clay tiles) laid at a gauge of between 265mm and 345mm and is suitable for use on new build or refurbishment projects.

- Advantages:**
- Improved design for better appearance
 - Easy clip together feature
 - Secure fixing offers better resistance to wind uplift
 - Compatible with most concrete interlocking tiles
 - Weatherproof and maintenance free
 - Compatible with wet or dry fixed ridges
 - May be fitted in inclement conditions
 - Quicker to fit than traditional methods
 - Unique vernier hole alignment for fixing
 - Largest range between batten gauges on the market
 - No special skills or tools required

Component part list:

FFV-401
Left Hand Dry Verge Unit. Packed 50 per box.

FFV-402
Right Hand Dry Verge Unit. Packed 50 per box.

FFV-403
Half Round Ridge End Cap. Packed individually.

FFV-404
Angled Ridge End Cap. Packed individually.

ESU 100
Eaves Starter Unit. Packed 10 per box.

VFC-L
Left Hand Verge End Closure. Packed 10 per box.

VFC-R
Right Hand Verge End Closure. Packed 10 per box.

BEC-120
Batten End Cover. Packed 10 per box.

Colours Available: Grey, Brown, Terracotta* and White*

* These colours could be subject to slightly longer lead times.